

MINI-TOWERS




Fasteners screwed:
maximum strength
of the assembly

DIN guide support:
prepared for the
installation of protection
elements

Direct anchoring to the floor:
possibility of installation without
using base

Installation of mechanisms
on both faces

Allows metal divider
plate: guarantees the
electromagnetic immunity
of the Voice, Data and
Multimedia (VDM) installation

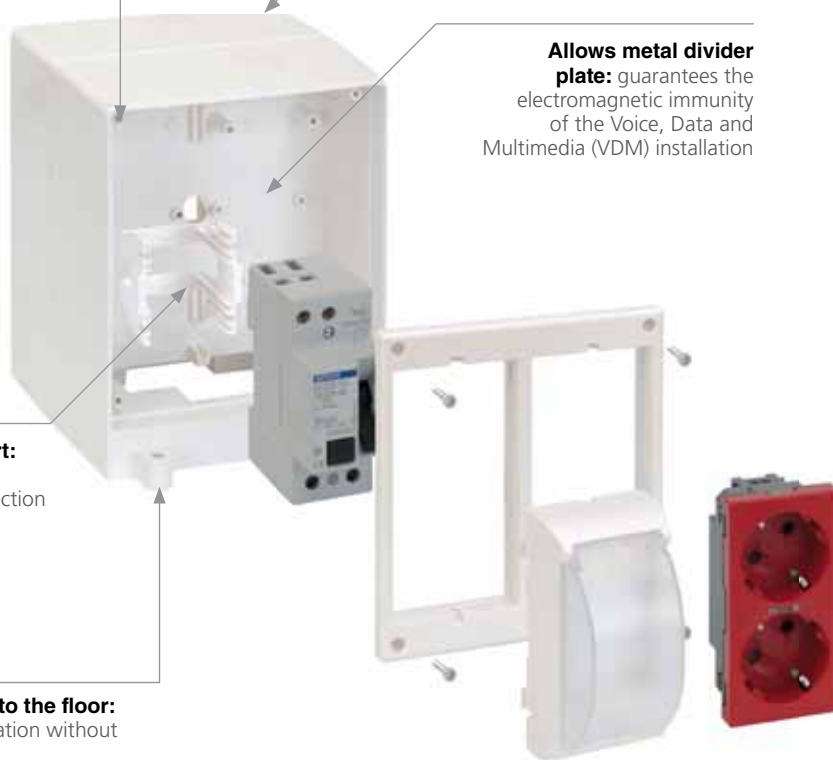

✓ Compact

Compact, robust design for
connectivity in minimum
space.




✓ With all necessary materials

The mini-tower is
supplied with a metal
divider plate, fixing plugs,
connection cable to the
earth connection, non-
slip adhesive foam and all
necessary hardware.



TOWERS

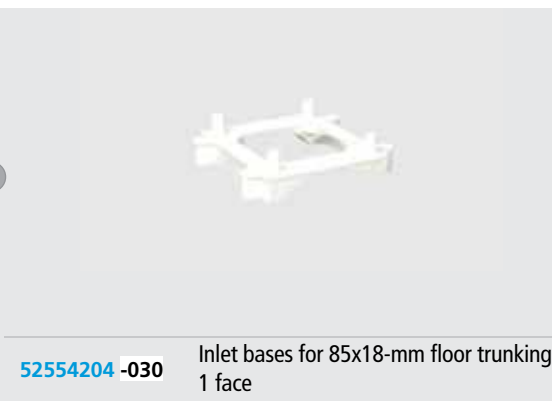

52550204 -030 Mini-tower, 2 modules per face

52554204 -030 Inlet bases for 85x18-mm floor trunking
1 face

UNDER-FLOOR POWER SUPPLY

CABLES FLUSH-MOUNTED OR UNDER RAISED FLOORING

In this type of installation, the mini-tower does not require a base.

Configuration example



Front face



Rear face

	Qty.	Ref./Finish	Description
Enclosure	1	52550204-030	Mini-tower, 2 modules per face
Electrical sockets and plates	3	50010432-030	Double Schuko socket, 1 click connection system with LED, white
	2	50001089-030	Flat V&D plate with dust protector with 2 cat. 6A RJ45, white

POWER SUPPLY THROUGH FLOOR TRUNKING

THE BASE MAKES IT POSSIBLE TO SUPPLY THE MINI-TOWER BY MEANS OF THE 85x18 DCS FLOOR TRUNKING

Configuration example



Front face



Rear face

See DCS trunking in page 114

	Qty.	Ref./Finish	Description
Enclosure	1	52550204-030	Mini-tower, 2 modules per face
	1	52554204-030	Input base for floor trunking, 1 85x18-mm face
Electrical sockets and plates	2	50010432-037	Double Schuko socket, 1 click connection system with LED, red
	4	50001085-030	Flat V&D plate with dust protector with 1 cat. 6A RJ45, white
Access trunking	2	TF11172/8	85x18 DCS floor trunking (length according to the installation), aluminium

